



Bike Bike Rack




Don't forget to ask about our custom logo option!



The Bike Bike Rack is an eye-catching, functional piece of street art that playfully reminds us that we could be riding our bike today, and rewards those that do with a secure, convenient place to park it.

The Bike Bike Rack forces bikes to lock up parallel with the rack, helping to keep right of ways clear. The rack allows for the wheels and frame of the bike to be secured using a u-style bike lock.

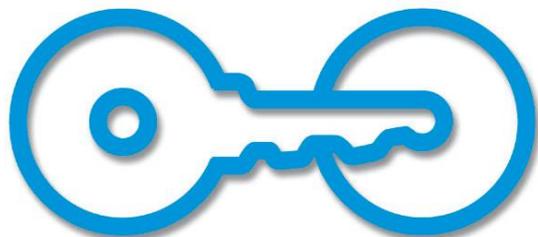

American Bicycle Security Company

P.O. Box 7359

Ventura, CA 93006



Ph: (800) 245-3723 or (805) 933-3688

Fax: (805) 933-1865

www.ameribike.com

Email: turtle@ameribike.com

Bike Bike Rack

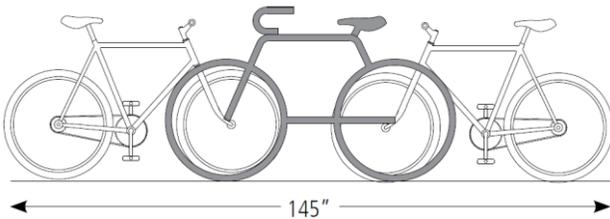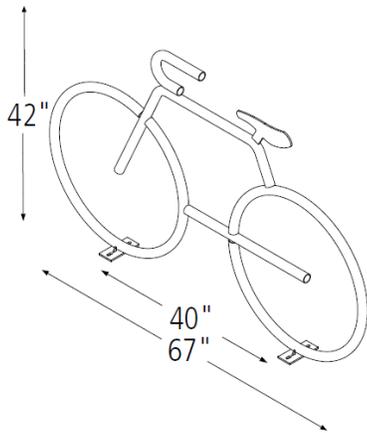

Example of rack in use

Product Hoop Rack
Capacity 2-4 Bikes
Materials 1.5" OD 11 Gauge Tube. All open ends are capped to prevent moisture from entering. All welds are MIG welds around entire circumference of joined pieces.

Finishes Standard options: Galvanized Or Powder Coated



RAL 9005	Flat Black	RAL 9003	RAL 2004	RAL 1023	Bright Yellow
RAL 6016	RAL 6018	RAL 6005	RAL 5005	RAL 5015	Purple
RAL 7011	RAL 7042	RAL 9007	RAL 1001	RAL 8014	Bronze
RAL 3003	RAL 3005				

Also available in Thermoplastic or Stainless steel.

Installation Methods **In-ground mount** is embedded into concrete base. Specify in ground mount for this option.


Surface Mount Each rack has two 2.5" x 6" mounting brackets double gusset welded to the "wheels". The brackets are 40" apart. Each bracket is anchored to the ground with two anchors. Anchors are included with each rack.

Space Use & Setbacks **Wall Setbacks:** For racks set parallel to a wall: Minimum: 24" Recommended: 36"

For racks set perpendicular to a wall: Minimum: 64" (for 4 bike capacity)

Distance Between Racks: Minimum: 24" Recommended: 36"

Street Setbacks: Minimum: 36"

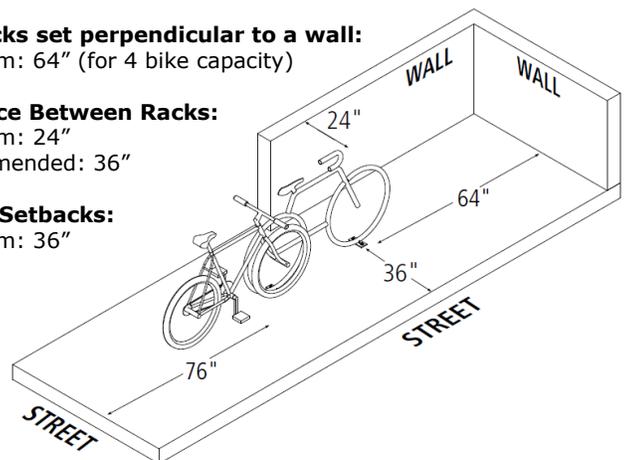

American Bicycle Security Company

P.O. Box 7359


Ventura, CA 93006

Ph: (800) 245-3723 or (805) 933-3688


Fax: (805) 933-1865

www.ameribike.com

Email: turtle@ameribike.com

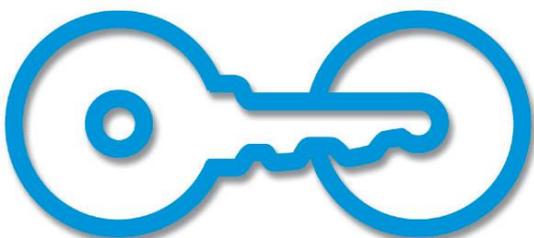

Bike Bike Rack Surface Mounted Installation

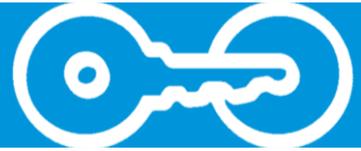

*Tools Needed for Installation


- Tape Measure
- Marker or Pencil
- Masonry Drill Bit
- Drill (*Hammer drill recommended*)
- Hammer
- Wrench 9/16"
- Level

Recommended Base materials:

Solid concrete is the best base material for installation. To ensure the proper anchors are shipped with your rack, ask your American Bicycle representative which anchor is appropriate for your application. Be sure nothing is underneath the base material that could be damaged by drilling.

Installation:

3/8" anchors are shipped with the rack. Place the rack in the desired location. Use a marker or pencil to outline the holes of the flange onto the base material. (TIP: If installing more than one Bike Bike Rack, mark holes for each rack individually, as there may be slight differences between each rack). Drill the holes in accordance with the specifications shipped with the anchors. Make sure the holes are at least 6" away from any cracks in the base material. Tap in anchors and follow your specific anchor instructions provided with the rack.

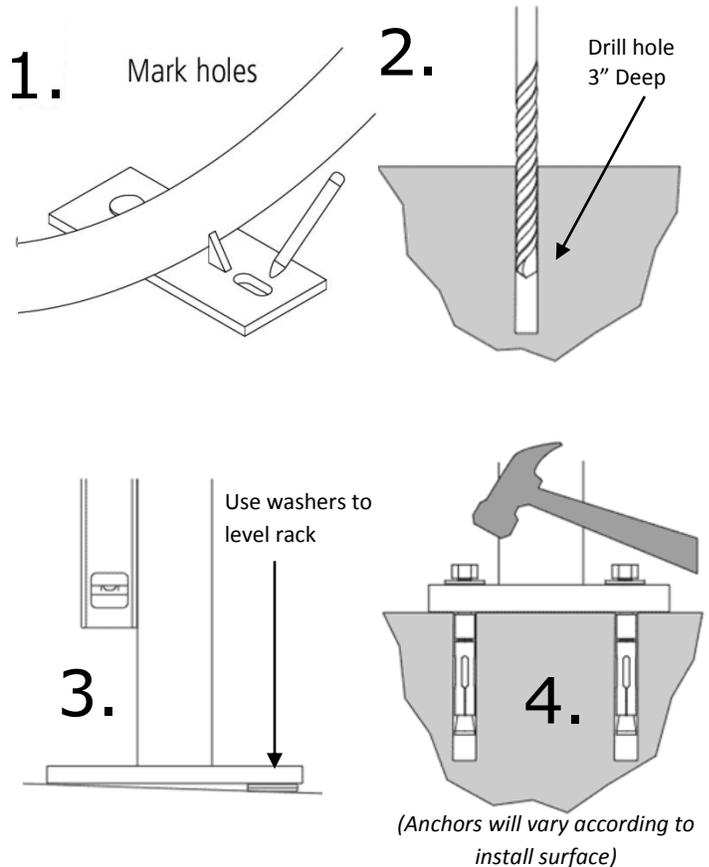

Breakaway Nut



Stainless Tamper-Proof Nut



Triple-slot Nut




Concrete Spike

Tamper Resistant Hardware

More than standard racks, the Bike Bike Rack may be a target for theft. Therefore we recommend using a fastener that can't be removed by thieves. The concrete spike is a permanent anchor. The top of the wedge anchor can also be pounded sideways after installation so that it cannot be removed. Other tamper resistant fasteners can also be purchased.

When using the special tamper resistant nuts, always set and first tighten the anchors. Once the rack is installed, replace two nuts from the bracket (opposite sides from each other) with the tamper resistant fastener.

DO NOT OVERTIGHTEN the tamper resistant nut.

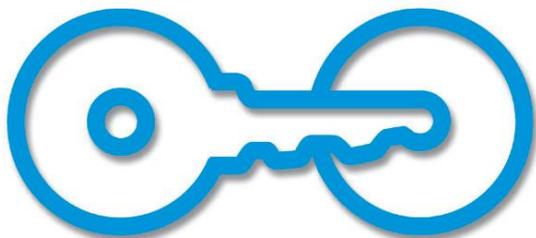

American Bicycle Security Company

P.O. Box 7359

Ventura, CA 93006

Ph: (800) 245-3723 or (805) 933-3688

Fax: (805) 933-1865

www.ameribike.com

Email: turtle@ameribike.com