
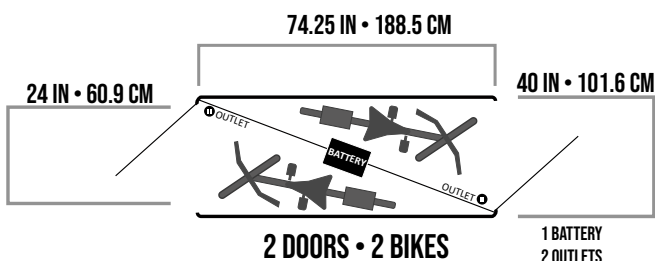


Bike-Shell® Model 352SS

NO ASSEMBLY REQUIRED

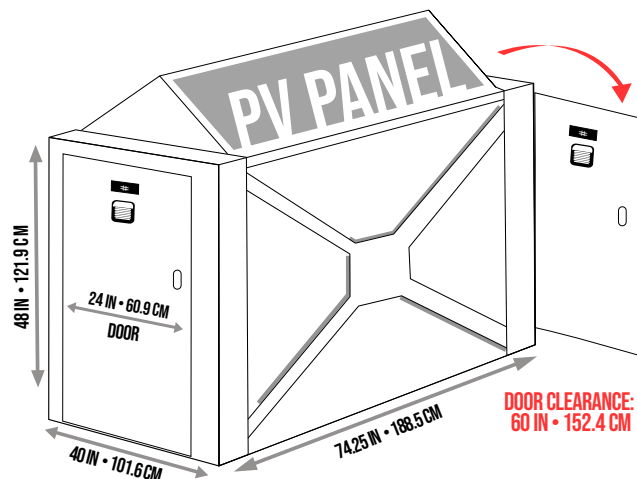

Product Bike-Shell® Model 351

Capacity 2 doors / 2 Bikes or Disaster Storage Container

Setback **Please allow 5ft clearance for door**

Solar-Shell® Power System

- **Molded fiberglass reinforced plastic composite body**
- "X" pattern on stippled walls
- Smooth door frame with stippled door surface
- Locker body joined by internal fasteners

- Integrated photovoltaic (PV) power unit consisting of:
 - o PV panel
 - o Controller unit
 - o 12V → 110V inverter
 - o Battery Box

System Function

- PV panel maintains charge in 12V gel battery
- 12V power converted to 110V through inverter
- 110V output powers the bike's internal battery charger
- Battery provides charging capability in low-sunlight conditions

Electrical & Safety Features System Voltage

- Operates at safe 12V DC (no building code conflicts)
- UL-approved inverter for bike charging unit connection
- Integrated protection circuitry with automatic shutdown
- Self-initializing system automatically resumes charging after shutdown
- Prevents electrical component damage under fault conditions

Accessories **Standard Locker Accessories (No charge)**

- Number plates
1, 2, 3... etc. Custom:
- Stainless steel louvered vents
- Gear hooks

Color **7 Standard Color Options (No charge)**

White	Tan	Cafe	Teal
Green	Blue	Med. Grey	

Standard Options - Please make a selection for Lock Type, Color & Grouping.

Locks

2 Standard Lock Options (No charge)

- High-security, T-Handle Abloy cylinder lock, removable plug-type cylinder. Lock is recessed in the door face. Includes 3 user keys per lock and 1 master key per set.

- Heavy duty stainless steel Padlock/U-Lock handle will accommodate high security Padlocks and U-Locks. For U-Locks from ½" to ¾" Diameter. Padlocks and U-Locks not included.



SS T-Handle with Master Key



Padlock/U-Lock Handle



AMERICAN BICYCLE SECURITY COMPANY®

PO BOX 7359 • VENTURA, CA 93006 • (800) BIKE-SAF